


## TOPWET TWS and TWS C aluminium shaft

### BASIC INFORMATION

<b>purpose</b>	protection of roof outlets, sanitation outlets, attachments and gutter spouts against inbreak of aggregate on roofs with an additional loading layer of shingle
<b>Material</b>	aluminium 1.5 mm thick
<b>load category</b>	K3 – 300 kg
<b>certification</b>	EN 1253-2:2015 - Gullies for buildings - Part 2: Roof drains and floor gullies without trap
<b>manufacturer</b>	TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic

### TECHNICAL PARAMETERS

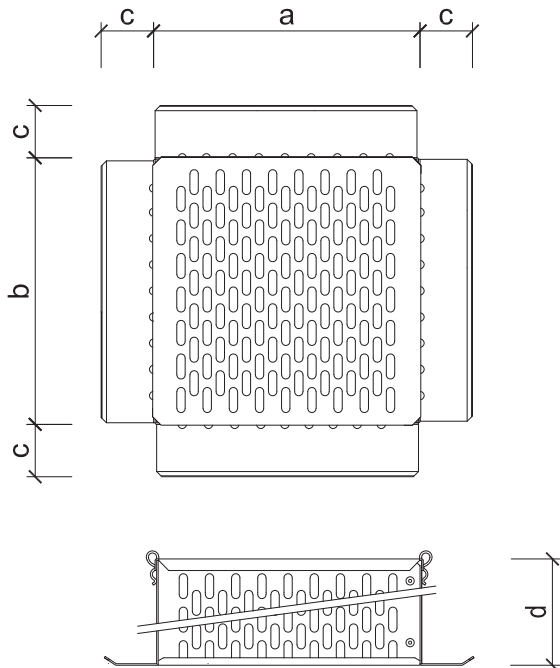

#### Aluminium shafts for roofs with shingle

Type	Dimensions [mm]			
	a	b	c	d
TWS 250x250x100	255	255	50	100
TWS 250x250x200	255	255	50	200
TWS 250x250x100 + TWSK	255	255	50	102
TWS 250x250x200 + TWSK	255	255	50	202
TWS C 250x150x100	253	153	50	100
TWS C 250x150x200	253	153	50	200
TWS C 250x150x100 + TWSK C	253	153	50	102
TWS C 250x150x200 + TWSK C	253	153	50	202